

Full-height turnstile


ID GATE 1900



PRODUCT DESCRIPTION

The ID Gate 1900 is a robust and reliable full-height turnstile designed for both indoor and outdoor use. It is particularly well-suited for security-sensitive areas such as swimming pools, fitness centers, parking facilities, airports, industrial sites, stadiums, and public transportation environments.

DIMENSIONS

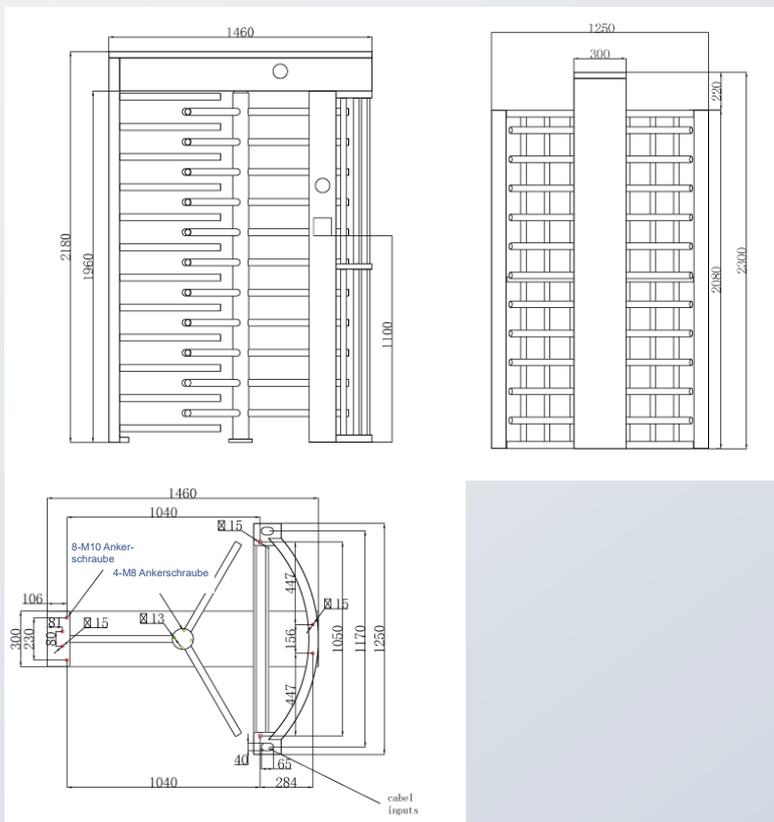

HIGHLIGHTS

- Full-height turnstile for effective access control
- Automatic reset after access delay (after 5 seconds)
- Supports transponder-based, ticket-based, or free-turn access
- Free passage in case of power failure or fire alarm
- Suitable for both indoor and outdoor use
- Integrated LED display for visual direction guidance
- Stainless steel housing, designed for indoor and outdoor environments
- Supports one-way or two-way operation

Accessories (Optional)

- iDTRONIC RFID Built-In R840
- QR Code/ RFID Combi-Reader ID 1500/1200
- Integration of Third-Party Readers (z.B. MIFARE, LEGIC, EM, HID etc.)

TECHNICAL DATA

SPECIFICATION	Single	Double	Barrier-free
Dimensions	Without Roof: 1460 x 1250 x 2300mm With Roof: 1460 x 1460 x 2300mm	Without Roof: 2200 x 1250 x 2300mm With Roof: 2200 x 1460 x 2300mm	Without Roof: 2450 x 1260 x 2300mm With Roof: 2450 x 1264 x 2580mm
Material	Stainless Steel 312		
Power Supply	AC220V / 110V, 50/60Hz		
Operating Voltage	24V DC		
Passage Frequency	30 people per minute		
Emergency Mechanism	Free passage in the event of a power failure		
Interface	Relaisignal, RS485		
Operating Location	Indoor & Outdoor		
Operating Temperature	-15°C up to +60°C		
Humidity	≤90%		

ORDER CODES

DESCRIPTION	
ID Gate 1900	• R-TS-IDG-1900

PRODUCT IMAGES



1900 SINGLE



1900 DOUBLE



1900 BARRIER-FREE



**1900 SINGLE
ROOF**



**1900 DOUBLE
ROOF**



**1900 BARRIER-FREE
ROOF**