


MPR Series

HF M30

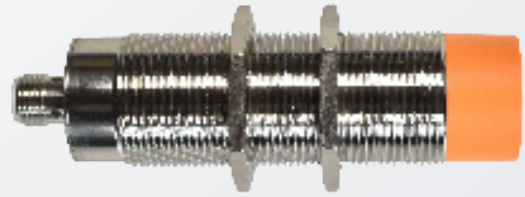

PRODUCT DESCRIPTION

The MPR Series HF M30 is a fixed and compact all-in-one HF RFID reader for industrial automation processes.

In combination with the integrated circular antenna and a gain of -8 dBi, MPR Series HF M30 can achieve reading distances of up to 50 centimeters within industrial environments.

Typically this device will be used within the industrial automation at production lines and conveyor belt systems. Another wide spread application is the identification of tool attachment at construction, municipal and farming vehicles.

The MPR Series HF M30 comes with a RS232 and a TCPIP POE interface and a power supply of 10 to 26 V. This RFID device allows a flexible and fast integration into many existing applications with its easy to install cylindrical housing and standardized M12 connectors.

iDTRONIC's MPR Series HF M30 supports the well known M30 SDK with demo and setup tools. The Windows based tools support all operating systems starting from XP up to Windows 10.

APPLICATIONS

- Industrial Automation
- Material Handling
- Tracking & Tracing
- Attachment Identification
- Production Control

FEATURES

- 10 to 24 V Power Supply
- Up to 6 cm Reading Distance
- Compact Cylindrical Housing
- IP67
- M12 Connector

AVAILABLE INTERFACES

- RS232
- TCPIP POE

RFID OPTIONS

- HF
 - ISO 14443A/B
 - ISO 15693

TECHNICAL DATA

ELECTRICAL SPECIFICATIONS

Power Supply	10 - 24 Vdc
Power Consumption	4 W
Operating Frequency	HF: 13.56 MHz
Antenna	Integrated
Operating Distance	up to 6 cm*
Communication Interface	RS232 TCP/IP POE
Status Display	signal LED
Connector	A-coded male connector M12

ANTENNA SPECIFICATIONS

Antenna Gain	-8 dBic
Beam Width	100° / 170°
Axial Ratio	< 1.5 dB
Polarization	Circular

MECHANICAL CONDITIONS

Housing Material	Metal
Overall Dimensions	M30 x 2 x 91 mm
Weight	144 g
Protection Class	IP67

ENVIRONMENTAL CONDITIONS

Operating Temperature	-20 up to +55°C
Storage Temperature	-40 up to +85°C
Humidity	up to 95%, con-condensing

SDK INFORMATION

Supported OS	Windows 10, 11
Demo Software	Windows

SUPPORTED STANDARDS / TAGS

ISO 14443 A	Read/write: MIFARE® Classic 1K /4K, MIFARE Ultralight®, MIFARE Ultralight® C, MIFARE DESFire® EV1/EV2/EV3, MIFARE® Smart MX, MIFARE® Plus S / X, MIFARE® Pro X, NTAG 21x Read UID only: all other ISO 14443A RFID tags
ISO 14443 B	SRI4K, SRIX4K, AT88RF020, 66CL160S, SR176
ISO 15693	EM4135, EM4043, EM4x33, EM4x35, I-Code SLI / SLIX, M24LR16/64, TI Tag-it HF-I, SRF55Vxx (my-d vicinity) , Fujitsu MB89R112A

APPLICABLE STANDARDS

EMC	EN 301489-1:2012-04 (v1.9.21) EN 301489-3:2013-12 (V1.6.1)
Safety	EN 62368-1:2020 EN 62369-1:2010-03 EN 50364:2010-11
RoHS 2	EC Guideline 2011/65/EU and amendment 2015/863/EU, updated by 2017/2102/EU EN 50581:2012 (valid till 2024-07-07) EN 63000:2018
REACH	EU Guideline 1907/2006, updated by 2020/171/EU

***READING DISTANCE DEPENDS ON TAG, ANTENNA AND ENVIRONMENTAL CONDITIONS.**

ORDER CODES

VERSIONS

HF Multi-Purpose Reader M30 - RS232
HF Multi-Purpose Reader M30 - TCP/IP POE

ORDER CODES

R-MP-HF-M30-232
R-MP-HF-M30-ET/POE